

# LUBETAC OILS


SLIDE WAY / HYDRAULIC LUBRICANT

## Description

Bosse Lubricants® LUBETAC Oils are high performance fluids designed for applications where a single oil is used for both the way lubrication and the hydraulic system. It is manufactured with high grade virgin base oils to ensure good oxidation stability. The unique additive package is designed to keep ways from wear and scarring while providing a good level of anti-wear protection for most hydraulic systems.

Bosse Lubricants® LUBETAC Oils can be used as a tri-purpose oil as well. Because of the base oil and additive package, it is very versatile and can be used in most general shop applications where a general machine oil is required. *Replaces Mobil Vacuoline oils.*

LUBETAC OILS	1405	1409
ISO Grade	32	68
Specific Gravity	.86	.87
Flash Point @ 40°C (ASTM D-92)	>215	>240
Visco. cST @ 40°C	32	68
Viscosity Index (ASTM D-2270)	98	97
Copper Corrosion ((ASTM D-130)	1b	1b
Rust Test (ASTM D-665A)	Pass	Pass

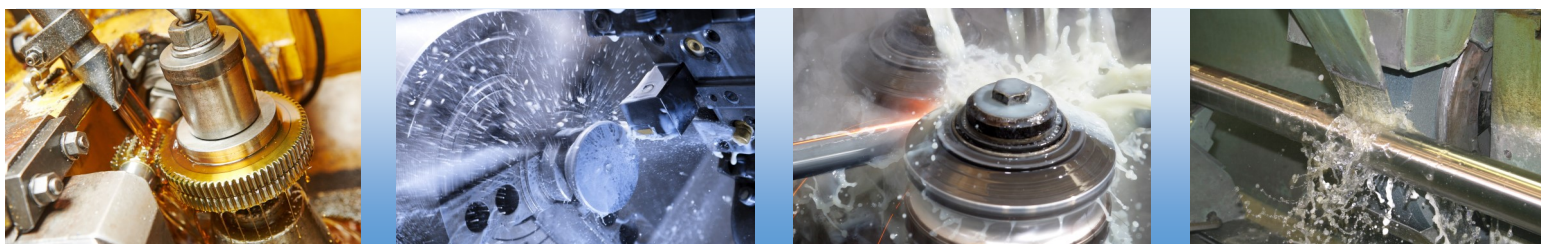

The product information and specifications contained herein have been compiled for the convenience of the user. It is intended to be used by people with technical skills. Bosse Lubricants® & Star Metal Fluids® disclaims any warranty, expressed or implied, of merchantability for any specific use, especially when such use is beyond our control. Whenever the information herein is to be used for a critical application it is the responsibility of the user to verify independently the appropriateness of its use in his application. This information is not intended as a license to operate under, or a recommendation to infringe any Bosse Lubricants® patent. The SDS must be consulted for appropriate information regarding storage, safe handling and disposal of product.