


BOS-WAY PREMIUM SLIDEWAY LUBRICANT

MACHINE WAY LUBRICANT

Description

Bosse Lubricants® BOS-WAY Premium Slideway Lubricant series is formulated with the highest of quality additives under strict Q.C control, resulting in products that meet or exceed international specifications established for slide way oils. This way oil series is available in three viscosities that meet the International Standards Organization (ISO) viscosity requirements for machine lubricants. All Bosse Lubricants® BOS-WAY oils meet or exceed the Cincinnati Machine P-47 specification and are **zinc-free**.

BOS-WAY	#1	#2	#4
ISO Grade	32	68	220
Specific Gravity	.87	.88	.89
Flash Point, COC, °F/°C	420/210	420/215	440/226
Pour Point, °F/°C	<0/-18	<0/-18	<0/-18
Visco. cST @ 40°C	32	68	220
Viscosity Index	>95	>95	>95
Color	Amber	Amber	Amber

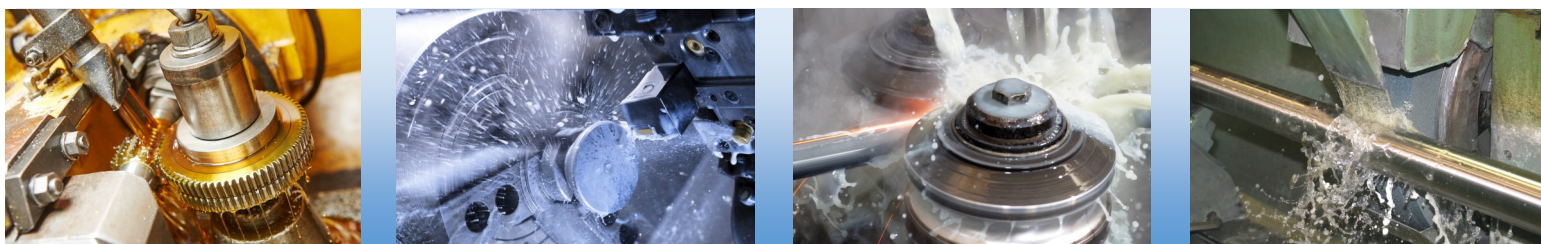

The product information and specifications contained herein have been compiled for the convenience of the user. It is intended to be used by people with technical skills. Bosse Lubricants® & Star Metal Fluids® disclaims any warranty, expressed or implied, of merchantability for any specific use, especially when such use is beyond our control. Whenever the information herein is to be used for a critical application it is the responsibility of the user to verify independently the appropriateness of its use in his application. This information is not intended as a license to operate under, or a recommendation to infringe any Bosse Lubricants® patent. The SDS must be consulted for appropriate information regarding storage, safe handling and disposal of product.